




# izi Sleep

REARWARD-FACING

USER MANUAL

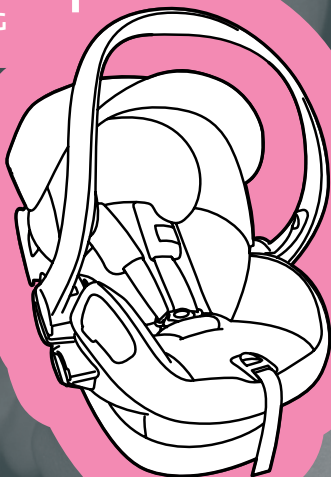

ECE R44 04

GROUP  
0+

WEIGHT  
0-13 kg

AGE  
0-12 m

**BeSafe**<sup>®</sup>

## Thank you for choosing BeSafe iZi Sleep

BeSafe has developed this seat with much care, to protect your child during the first phase of her or his life.

! It is important that you read this user manual BEFORE installing your seat. Incorrect installation could endanger your child.

### Contents

Vital information	3
Preparing to install	4
Rearward-facing belt installation	5
Removing the seat	7
Positioning the child	7
Sleeping position	9
Using the iZi Sleep with a stroller	10
Removing and refitting the cover	11
Cleaning instructions	11
Warning: potential misuse	12
Important advice	14
Guarantee	15
Point of Sale information	15

### Warning

#### ! Using the seat as a reclined cradle

- **IMPORTANT!** Keep for future reference.
- Never leave the child unattended.
- Do not use the seat as reclined cradle once your child can sit unaided.
- This seat is not intended for prolonged periods of sleeping.
- It is dangerous to use this seat on an elevated surface.
- Always use the restraint system.
- Do not use the seat if any components are broken or missing.



EN 12790-2009




### Vital information

- It is **NOT ALLOWED** to mount the seat in a front passenger seat **WITH AN ACTIVATED AIRBAG**.
- iZi Sleep can only be installed rearward-facing with a 3-point car belt, approved according to UN/ECE Regulation No.16 or other equivalent standards.
- iZi Sleep is approved for group 0+, rearward-facing from 0-13 kg.
- The child must always be secured with the internal harness straps when seated in the child seat. The same applies to carrying the seat and when using in combination with a stroller.
- The seat cover contains magnets in the areas with the orange indications. Magnets can influence electronic equipment such as pacemakers.
- If the child weighs over 13 kg or his shoulder height reaches above the highest position of the shoulder straps, you will need to change to a group 1 seat.
- The seat must always be replaced following an accident. Although it may look undamaged, in the event of another accident, it might not be able to protect your child as well as it should.
- Prevent the iZi Sleep from becoming trapped or weighed down by luggage, seats and/or slamming doors.
- Before every use, make sure the harness is not damaged or twisted.
- Make sure you can fit no more than one finger between the harness and your baby (1cm).
- Make sure that the car belt runs in a straight line over the shoulder belt guide and through the belt slot at the buckle side.
- If in doubt, consult either the child restraint manufacturer or the retailer.



## Preparing to install

### Crucial parts

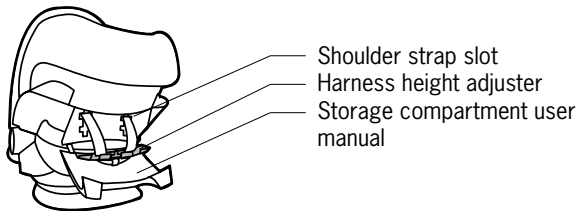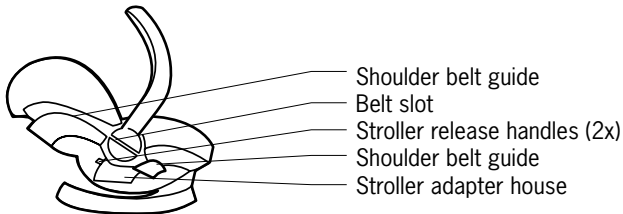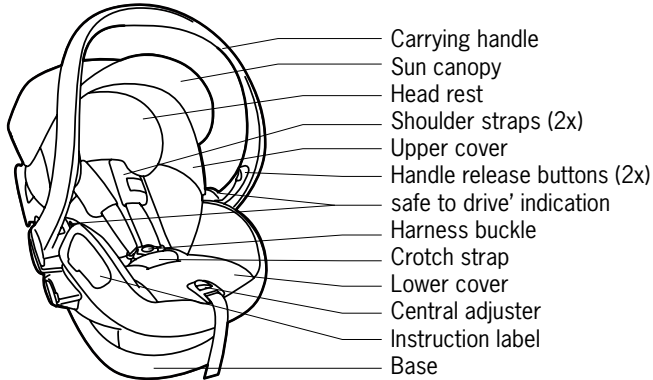


## Rearward-facing belt installation


- It is **NOT ALLOWED** to mount the seat in a front passenger seat **WITH AN ACTIVATED AIRBAG**.




- 1- Position the seat on the vehicle seat. Make sure the carrying handle is in the carrying position (1).



- 2- Make sure the lap belt of the 3-point belt is placed between the base and the lower seat shell and close the buckle (2).

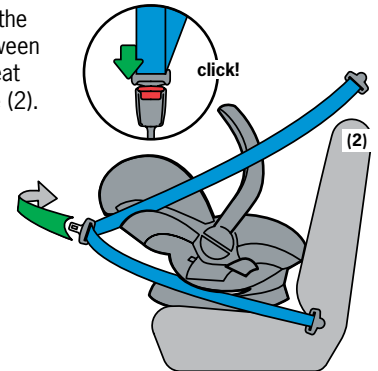


- 3- Pull the 3-point belt through the shoulder belt guide and belt slot, only at the buckle side. Follow the blue indications on the seat. Tighten the 3-point belt around the iZi Sleep (3).



- 4- Press the handle release buttons on the inside of the handle and move the carrying handle (tensioner) to the furthest possible of the 2 'safe-to-drive' positions. For better contact, position the backrest of the vehicle seat more upright (4).



- 5- Check the 'safe-to-drive' indication near the handle release button (5).



- 6- Positioned in the back seat of the vehicle, you should push the front seat of the vehicle backwards, so that it is in contact with the child seat. Positioned in the front seat, you should push the front seat forwards, so that the child seat is in contact with the dashboard. If this is not possible, leave a space of minimum 25 cm between child seat and back rest of the front seat or dashboard.

## Removing iZi Sleep

- Push the handle release buttons and move the carrying handle into carrying position. Then, release the 3-point belt from the buckle and remove the belt from the belt guide.

## Positioning the child


- To position your child, you can fold the carrying handle behind the seat, by pressing both handle release buttons.
- Position the shoulder straps: Check that the shoulder strap slots are levelled with your child's shoulders (6).



- To adjust the shoulder belts, open the storage compartment on the back side of the iZi Sleep. Detach the harness height adjuster and position it in the correct position by supporting the belt from the inside. Make sure the adjuster is clicked in (7).




- 1- Pull the shoulder straps up while pressing the button of the central adjuster (8).


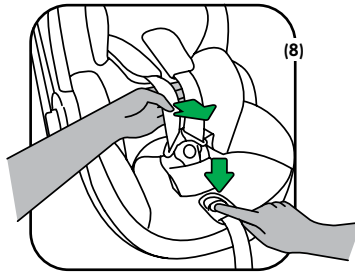


- 2- Open the harness buckle.

- 3- Position the shoulder straps over the orange marking at sides of the seat to keep the harness open while you position the child (9).



- 4- When the child is positioned, place the shoulder straps over the child's shoulders and close the buckle: click! (10/11).



- 5- Pull the harness strap through the central adjuster in the direction of the green arrow straight up-/forward. Continue pulling until the harness is a comfortable but firm fit (12).




- Make sure that the harness straps are always locked and tightened when the child is in the seat. !

- You can protect your child against the sun by unfolding the sun canopy.

### Sleeping position

- Your child can comfortably rest and sleep in the iZi Sleep when you position it in the sleeping position (only outside the car). To put the iZi Sleep into the sleeping position, push both handle release buttons on the inside of the carrying handle and move the handle to the head of the iZi Sleep (13).

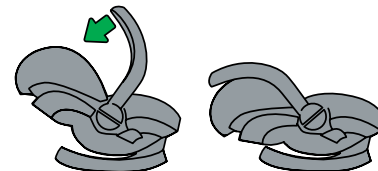


## Using the iZi Sleep with a stroller


- The iZi Sleep can be installed on a range of strollers. For a complete list check [www.besafe.eu](http://www.besafe.eu)

### Installation on a stroller

- 1- Align the stroller adapter house above the adapters of the stroller and move straight down, click (2x) (14).




- 2- Move the carrying handle into sleeping position (15).



### Removing from a stroller

- 1- Move the carrying handle into carrying position.
- 2- Push the stroller release up at both sides while lifting the seat vertically from the stroller (16).

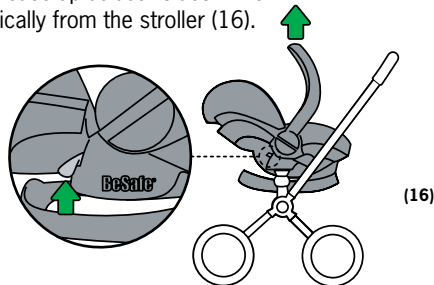

## Removing and refitting the cover

### Removing the cover


- Pay attention when you remove the cover, as fitting the cover is done in the opposite way.
- Remove the headrest.
- Remove the upper cover. Detach the cover from the small hooks on both sides of the back part. Release the rubber bands that attach the cover to the inside of the back. Open the zippers on both sides and detach the velcro. Pull the cover from the seat plate.
- Remove the lower cover. Detach the elastic knots of the lower cover. Pull the cover over the central adjuster. Detach the elastics which attach the cover to the inside of the seat part of the iZi Sleep.

### Refit the cover

- Refit the cover, using the removing instructions in reversed order. Start by pulling the cover over the seat plate.
- Pull the harness straps through the openings in the cover and close the zippers.

## Cleaning instructions

- The cover of the seat must be washed according to the instructions on the inside of the cover (17).




- DO NOT use any aggressive cleaning agents; these may harm the construction material of the seat.

## Warning: potential misuse


- It is NOT ALLOWED to mount the seat in a front passenger seat WITH AN ACTIVATED AIRBAG.




- DO NOT use the seat in sleeping position in the vehicle (18).

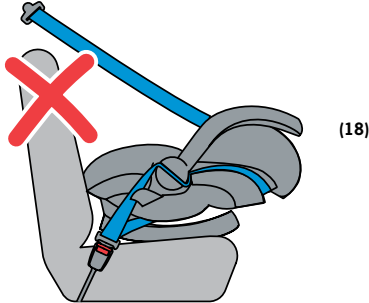

- DO NOT use the iZi Sleep with the carrying handle in carrying position. The handle must be in 'safe-to-drive' position showing green indications (19).

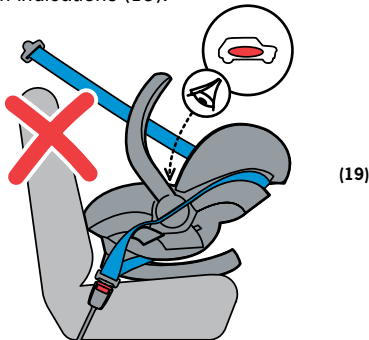


- Install only with 3-point car belts, approved according to UN/ECE Regulation No.16 or other equivalent standards (20).

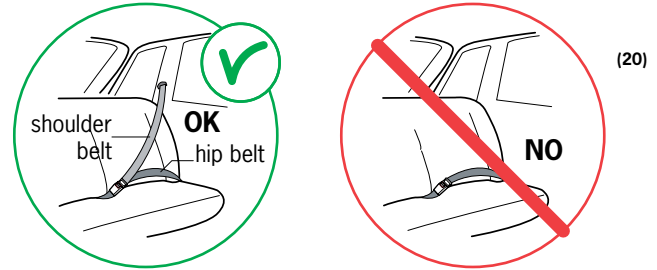

## Correct installation

- Hip belt between the base and the lower seat shell.
- Shoulder belt around the seat shell. Belt through the belt slot only at the side of the buckle.
- Seat belt fastened (21).

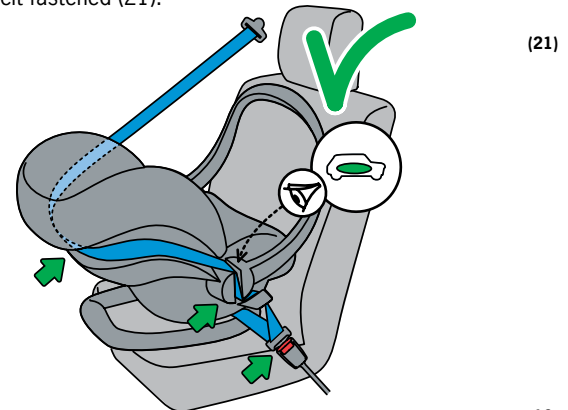

## Important advice

- DO NOT attempt to dismantle, modify or add any part to the seat. Warranty will expire if non-original parts or accessories are used.
- DO NOT use anything, such as a cushion, to raise the child seat off the passenger seat of the vehicle. In an accident the seat will not be able to protect your child in the right way.
- Never leave your child unattended in the seat.
- Make sure all passengers are informed about how to release your child in case of emergency.
- An unoccupied child seat should always be fastened in the vehicle.
- Make sure luggage or other objects are properly secured. Unsecured luggage may cause severe injuries to children and adults in case of accidents.
- Never use the seat without the cover. The cover is a safety feature and may only be replaced by an original BeSafe cover.
- Under the cover we use EPS foam. Do not push or pull too hard against the foam, since you might damage the foam.
- Do not use any aggressive cleaning products; these may harm the construction material of the seat.
- BeSafe advises that child seats should not be bought or sold second-hand.
- KEEP this user manual for later use with the seat.
- DO NOT use the seat for longer than 5 years. Due to ageing, the quality of the material may change.
- DO NOT use at home on a table or worktop, as long as your child is seated in the seat.

## Practical advice

When the child seat is mounted in the car check all the areas where the child seat might touch the interior. We recommend using a (BeSafe) protection cover in these places to avoid cuts, marks or discolouration on the interior of the vehicle, especially in vehicles with leather or wooden interior.

## Guarantee

- All BeSafe products are carefully designed, manufactured and tested. All our BeSafe child seats are tested periodically during flow production in our test laboratory. Furthermore they are tested by independent test institutes.
- Should this product prove faulty within 24 months of purchase due to materials or manufacturing fault, except covers and harness straps, please return it to the original place of purchase.
- The guarantee is valid only if you use your seat properly and with care. Please contact your dealer and he will decide whether the seat will be returned to the manufacturer for repair. Replacement or return cannot be claimed. Repair of the product does not extend the guarantee.
- The guarantee is cancelled in the following situations: if there is no receipt, if flaws are caused by incorrect and improper use, if the flaws are caused by abuse, misuse or negligence.

## Point of Sale information

### Notice for REARWARD-FACING installation

- This is a universal Child Restraint System. It is approved according to regulation No. 44.04, series of amendments for general use in vehicles fitted with 3-point car belts, approved to UN/ECE Regulation No. 16 or other equivalent standards.

### Your next car seat

- BeSafe offers several car seats suitable from 9 kg and up. For the updated car seat range see [www.besafe.eu](http://www.besafe.eu)



universal  
0-13 kg



04443548

HTS BeSafe as  
N-3535 Krøderen, Norway - [www.besafe.eu](http://www.besafe.eu)

**BeSafe**<sup>®</sup>